

Aluminum Outdoor Wall Mount 12 -24, 48-60 F OFCCC & FTTx


Size : 124.5 (D) x 408.5 (H) x 350 (W)
Materials : Aluminum 1.5 mm



Model : JK 12 - 24 F


Outdoor 24 Fibers Cable in Out 12 holes

Size : 1245 (D) x 408.50 (H) x 375 (W)
Materials : Aluminum 1.5 mm

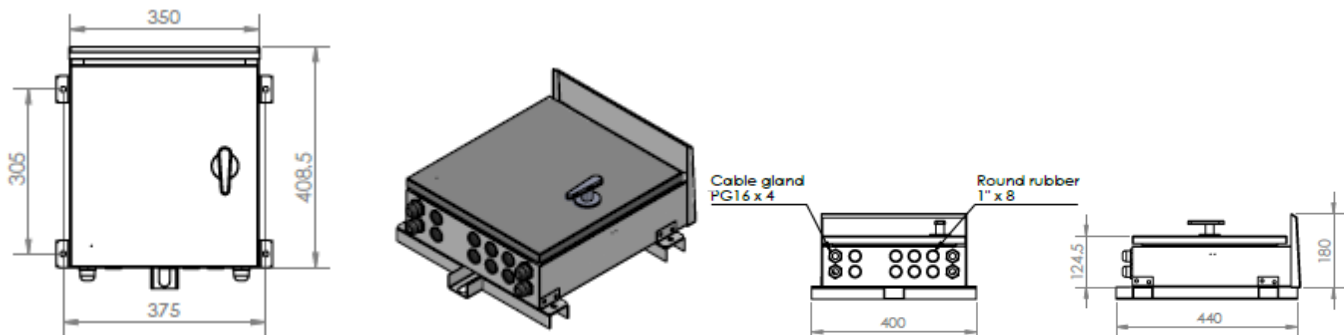

Aluminum Outdoor Wall Mount 48-60 F OFCCC & FTTx


Size : 155 (D) x 486.50 (H) x 390 (W)
Materials : Aluminum 1.5 mm

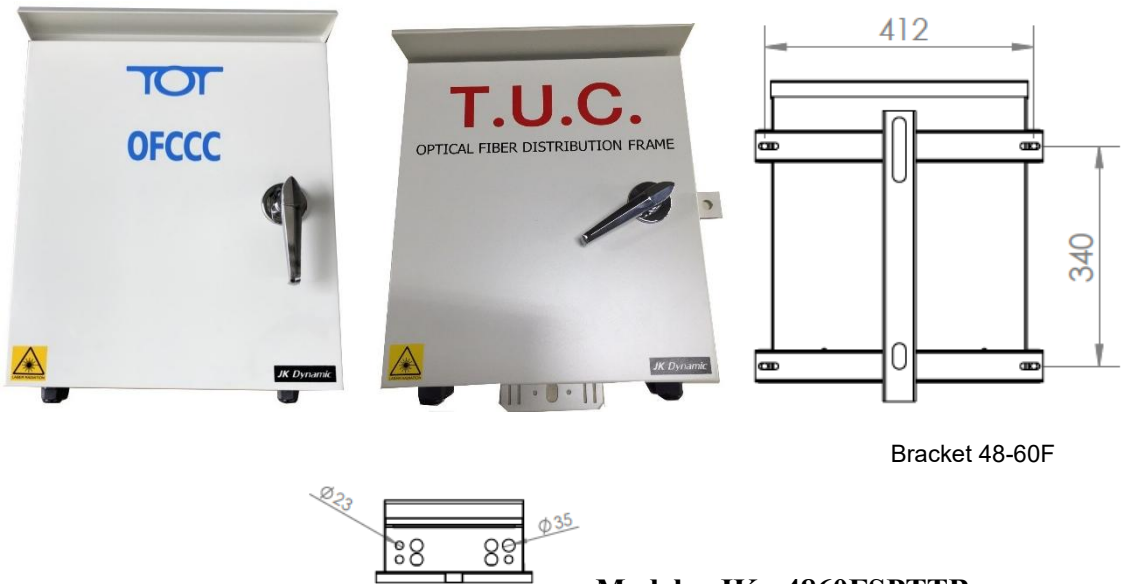

Model : JK - 4860FSPTTB

OFCCC & FTTx Aluminum Outdoor Wall Mount 72/120 Fibers

Size : 184 (D) x 616.4 (H) x 465 (W)
Materials : Aluminum 1.5 mm.

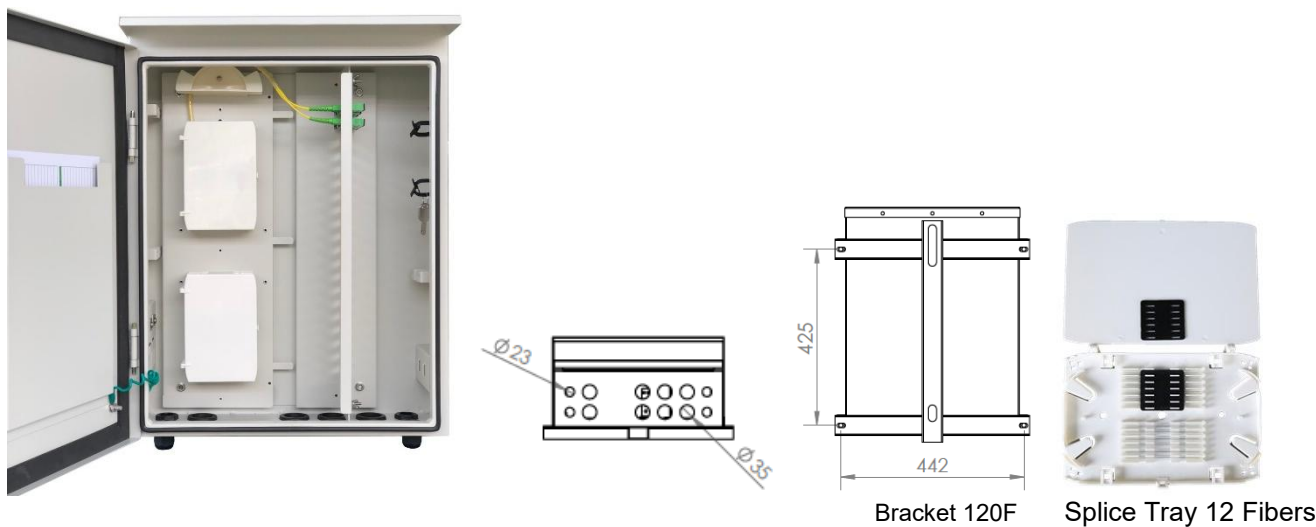


OFCCC & FTTx Aluminum Outdoor Wall Mount 72/120 Fibers - NEW

Size : 184 (D) x 616.40 (H) x 465 (W)
Materials : Aluminum 1.5 mm



OFCCC & FTTx Aluminum Outdoor Wall Mount 128/144 Fibers
Aluminum Outdoor Wall Mount 240 Fibers SC-DX

For Splitter 1 : 32 Type B with Packing Lots
Size : 170 (D) x 670 (H) x 430 (W)
Materials : Aluminum 2 mm.

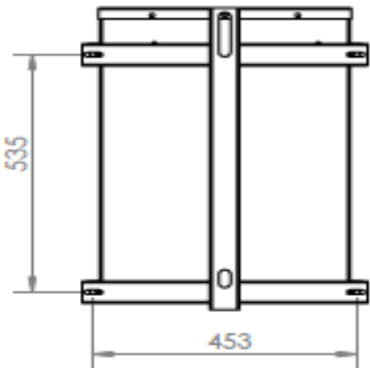

Bracket for Outdoor Wall 240 F



Splice Tray 12 Fiber




Splice Tray 24 Fiber


Model : JK – 128144FSPT

OFCCC Aluminum Outdoor Wall Mount 288 - 320 Fibers
SC Duplex

Size : W460 x H675 x D240 mm
Material : AL 2.00 mm

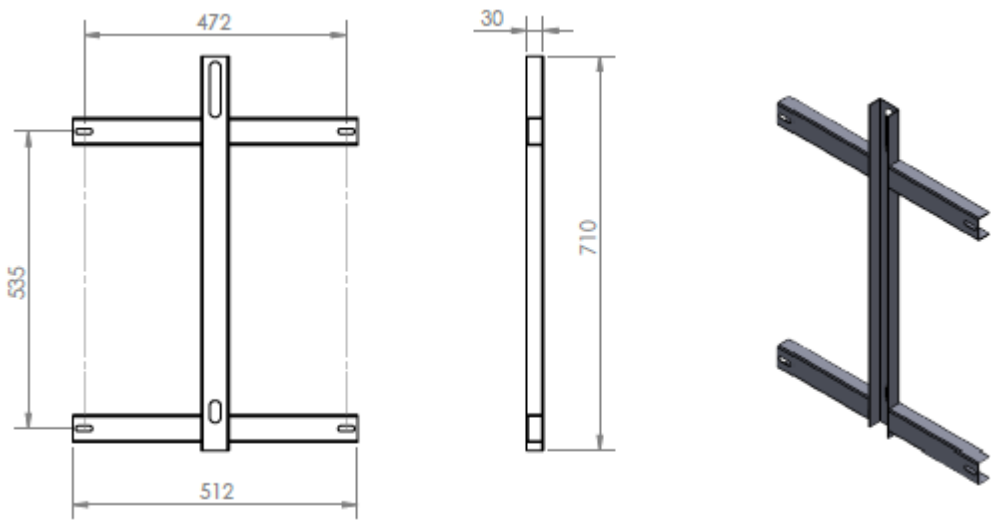

Bracket for Outdoor Wall Mount 288 - 320 Fibers


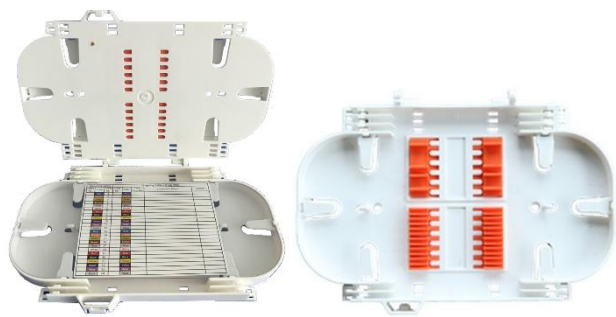


Splice Tray for SPT

Model : JK – 288FSC-DX

OFCCC Aluminum Outdoor Wall Mount 288 Fibers
SC - Simplex



Size : W500 x H665 x D314 mm
Material : AL 2.00 mm

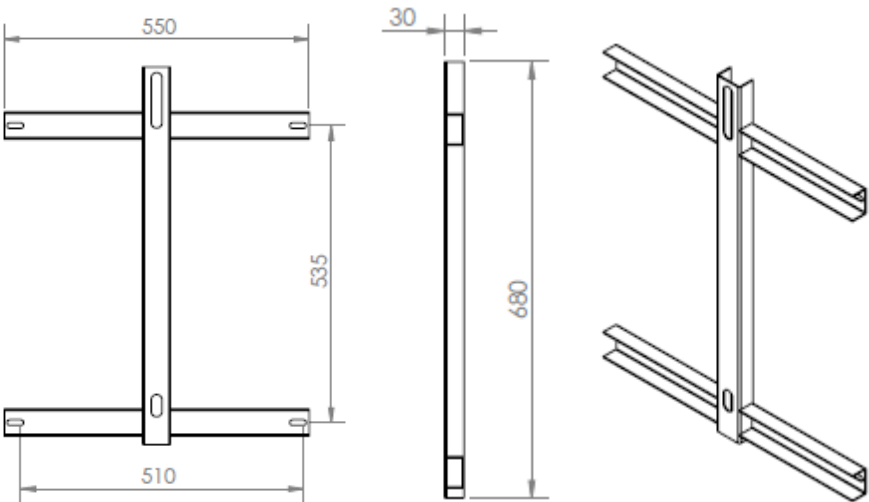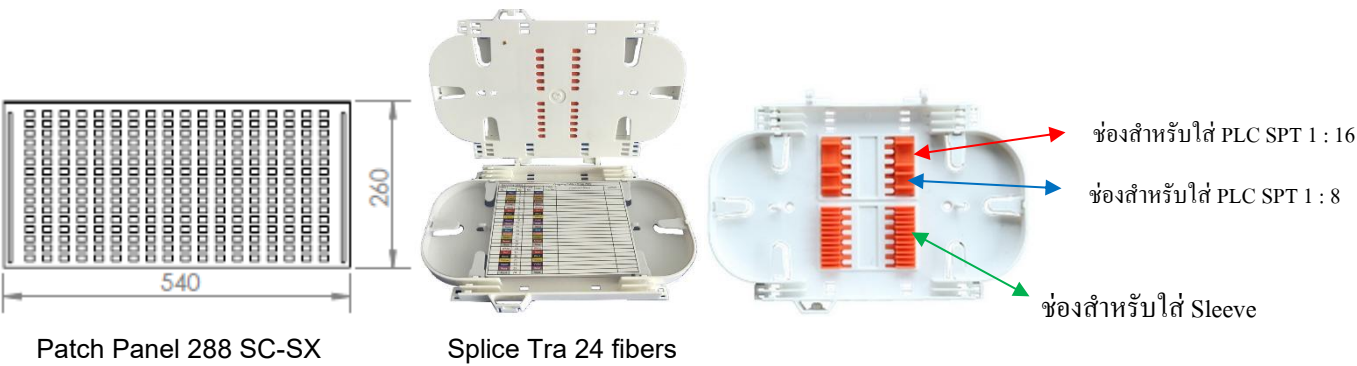

Bracket for Outdoor Wall Mount 288 Fibers SC-SX

OFCCC 288 SC-SX for Splitter Type B


Model : JK - 288FSPTTB

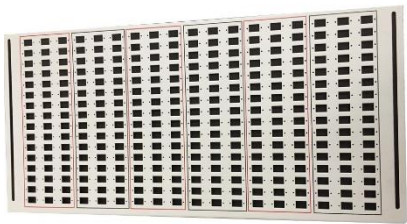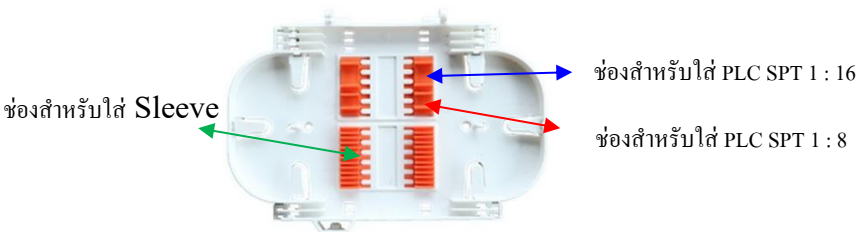

Patch Panel 288 SC-SX

OFCCC Aluminum Outdoor Wall Mount 8C/72F and 32C/72, For Splitter 1 : 8 Type B with Packing Lots

Size : 184 (D) x 616.4 (H) x 465 (W)
Material : Aluminum 1.5 mm.


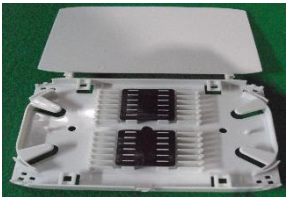


Splice Tray 12 Fibers

Model : JK - 3272FSPTTB



OFCCC Aluminum Outdoor Wall Mount 144 - 240 F

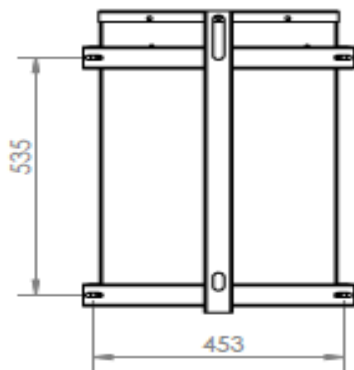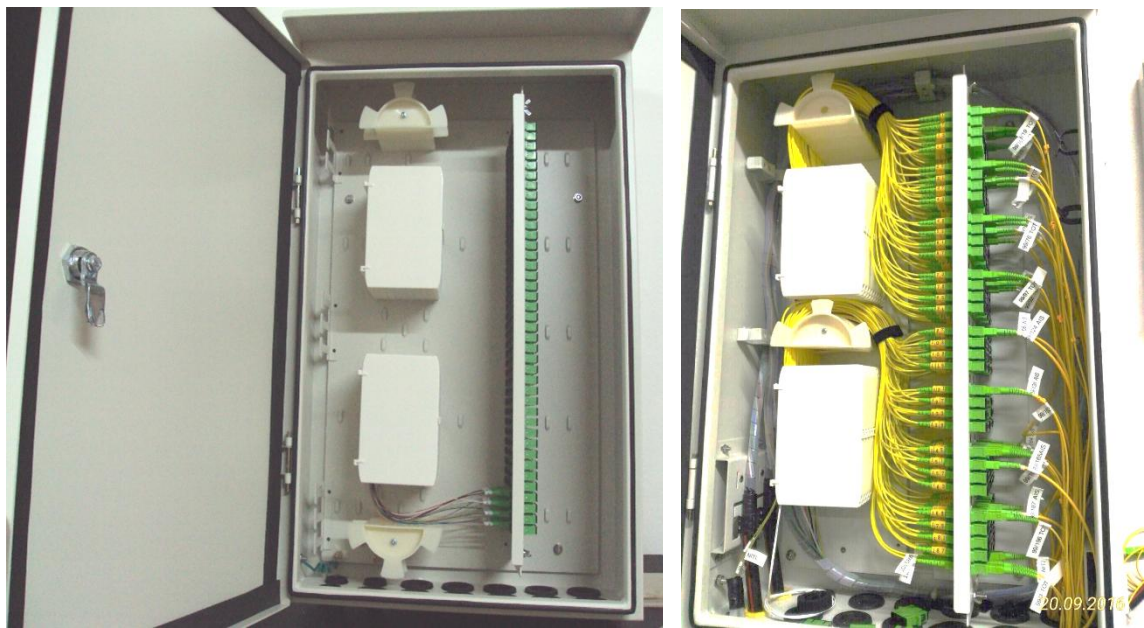

Bracket for 144 – 240 Fibers

Model : JK – 144F

Model : JK – 240FSC-DX

Mini OFCCC & FTTx 12 - 60 Fiber for Floor small type

- Size H = 94 cm w = 43 cm D = 17 cm



OFCCC & FTTx 144 Fiber for Floor

Size 995 x 430 x 200 mm



Model : JK 120-144 FF

Description

Aluminum Outdoor Wall-Mount Fiber distribution box made of Stainless and Aluminum sheet 1.5 mm and powder coated 65 micron. Aluminum Outdoor Wall Mount is available for 12, 24,48, 60, 72, 120, 128, 144 ,240 fiber in the standard beige color., the cable insertion the distributor is pre-punched for PG 21 cable glands optionally, cable can also be insert with connectors. The cable can be held in the preformed holes by a section cable inlet or cable feed through gromment depending on cable diameter.

Features / Benefits

- Provides easy access for connector FC ,SC ,LC, ST, E2000 panel
- OFCCC & FTTx 1 : 2 upto 1 : 64 PLC Splitter
- One door lockable and Key IP 65
- IP 65 protected
- 12, 24 splice tray holder
- Panel for adapter can be sliding

Material : Aluminum 1.5 & 2 mm.

Stainless sheet 1.5 mm

Bracket : EG Steel 2 mm

Size: MM.

12 - 24 PORT	=	124.5 (D) x 408.5 (H) x 350 (W)
48 - 60 PORT	=	155 (D) x 486.5 (H) x 390 (W)
48 – 60 PORT	=	155 (D) x 466.5 (H) x 390 (W) TRUE
72, 120 PORT	=	184 (D) x 616.5 (H) x 440 (W) TOT new
120 PORT	=	165 (D) x 506.5 (H) x 450 (W) TRUE
128, 144, 240 PORT	=	173 (D) x 665 (H) x 430 (W)
288 – 320 Port	=	233 (D) x 675 (H) x 460 (W)
288 SC-SX	=	314 (D) x 665 (H) x 500 (W)
480 Port	=	264 (D) x 882 (H) x 560 (W)
576 Port	=	309 (D) x 882 (H) x 560 (W)

Product Code : with Bracket

CODE	Product Type	Capacity	Packing	Net Weight	Gross Weight w/B
JK ODF0012	ODF 12F Outdoor Wall	12 Fibers	1 set/box	6.05 kg.	7.45 kg.
JK ODF0024	ODF 24F Outdoor Wall	24 Fibers	1 set/box	6.10 kg.	7.50 kg.
JK ODF0048	ODF 48F Outdoor Wall	48 Fibers	1 set/box	8.85 kg.	10.25 kg
JK ODF0060	ODF 60F Outdoor Wall	60 Fibers	1 set/box	8.90 kg.	10.30 kg.
JK ODF0072	ODF 72F Outdoor Wall	72 Fibers	1 set/box	11.25 kg.	12.65 kg.
JK ODF0096	ODF 96F Outdoor Wall	96 Fibers	1 set/box	11.95 kg.	13.35 kg.
JK ODF0120 D	ODF 120F Outdoor Wall	120 Fibers	1 set/box	12.00 kg	13.40 kg.
JK ODF0144 S	ODF 144F Outdoor Wall	144 Fibers	1 set/box		
JK ODF0240 D	ODF 240F Outdoor Wall	240 Fibers	1 set/box		
JK ODF0288 D	ODF 288F Outdoor Wall	288 Fibers	1 set/box		

JK OUTDOOR WALL MOUNTS 12 – 480 Fibers

Product Code : Pigtail + Adapter SC/APC + Bracket

CODE	Product Type	Capacity	Packing	Net Weight	Gross Weight
JK ODF0012	ODF 12F Outdoor Wall	12 Fibers	1 set/box	6.35 kg.	7.75 kgs
JK ODF0024	ODF 24F Outdoor Wall	24 Fibers	1 set/box	6.70 kg.	8.10 kgs
JK ODF0048	ODF 48F Outdoor Wall	48 Fibers	1 set/box	10.00 kg.	11.40 kgs.
JK ODF0060	ODF 60F Outdoor Wall	60 Fibers	1 set/box	10.35 kg.	11.75 kgs
JK ODF0072	ODF 72F Outdoor Wall	72 Fibers	1 set/box	13.55 kg.	14.95 kgs.
JK ODF0096 FC	ODF 96F Outdoor Wall	96 Fibers	1 set/box	14.25 kg.	15.65 kgs.
JK ODF0120 D	ODF 120F Outdoor Wall	120 Fibers	1 set/box	14.90 kg	16.30 kgs.
JK ODF0144 S	ODF 144F Outdoor Wall	144 Fibers	1 set/box		
JK ODF0240 D	ODF 240F Outdoor Wall	240 Fibers	1 set/box		
JK ODF0288 D	ODF 288F Outdoor Wall	288 Fibers	1 set/box		

SPLICE PROTECTIVE SLEEVE



Splice sleeve for fiber-optic fusion splices can be used to rebuild the primary coating for fiber to provide protection at the fusion joint area.
Structure : Shrinkable sleeve
Stainless steel rod



Generis Specifications :

Description	Typical diameter after heating Φ (mm)	Fusion Tube Φ (mm)	Length of the stainless steel rod l(mm)	Length of Sleeve l(mm)
45 mm	2.5	1.3	40	45
60 mm	2.5	1.3	55	60
Change of temperature	Temperature Cycle Cycles 1 cycle			- 40°C to +85°C 10 cycles 6 hr.